




BNE51msY

Fixed Headstock Type CNC Automatic Lathe




BNE-51MSY

The BNE series is renowned for its high rigidity, heavy cutting capability and outstanding precision. The new MSY model extends the ability of the BNE series with the adoption of X3 axis on the back spindle (SP2) and synchronized / superimposed control for 3-tool simultaneous machining. Faster cycle times, outstanding easy-of-use and the ability to machine complex work pieces is the result.

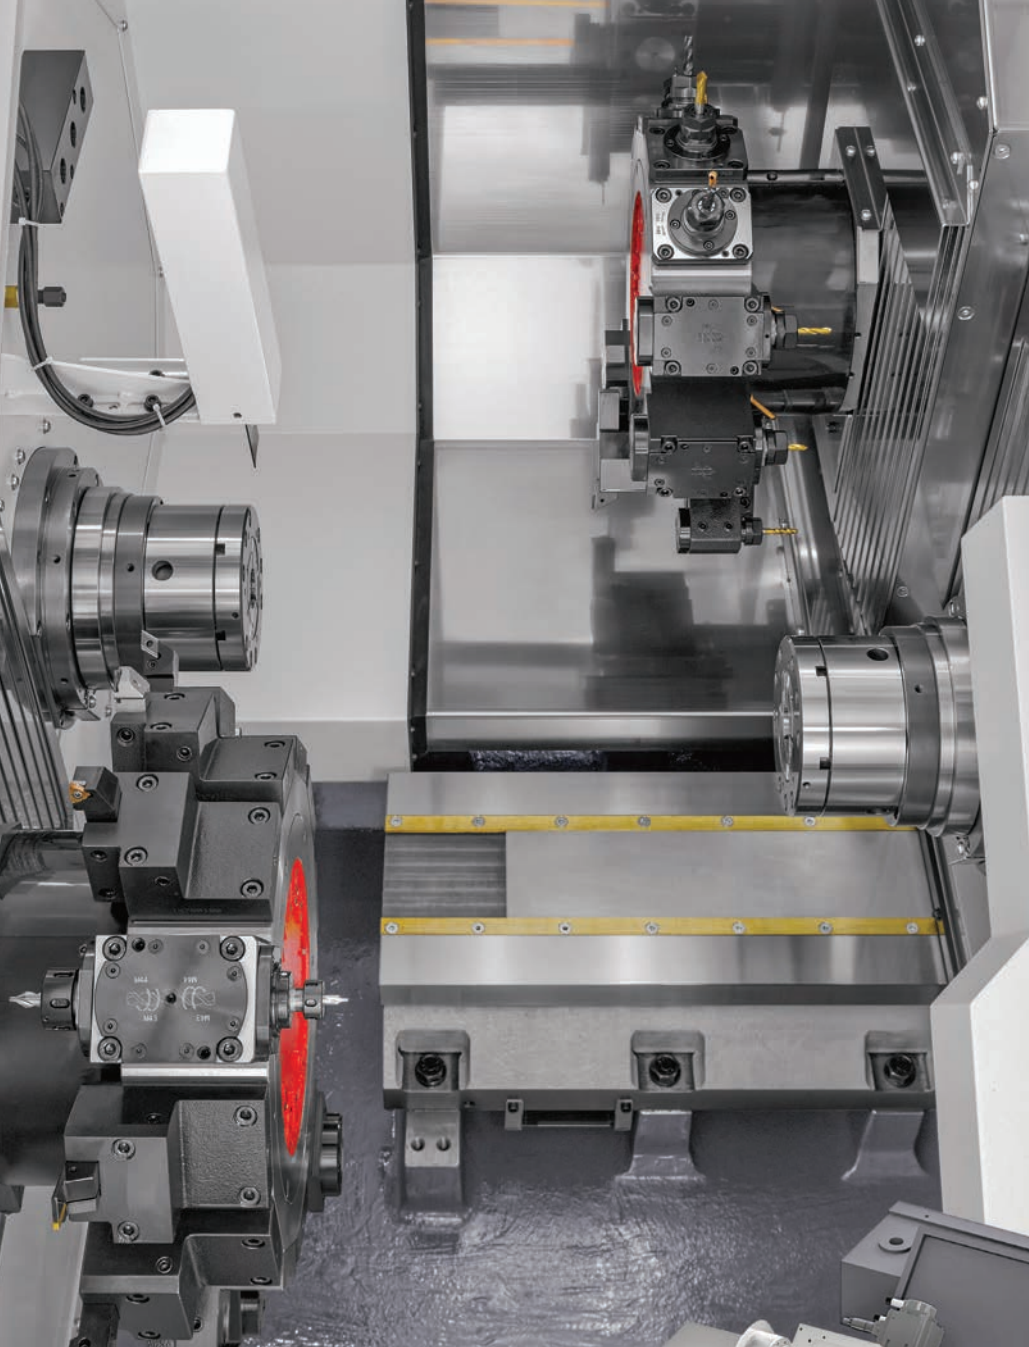


Machine structure

The basic construction of the machine, that is the combination of the highly rigid precision scraped square guideways and the heavy slanted bed cast in one piece, is the base to support high precision, heavy cutting and long tool life even in complex machining.

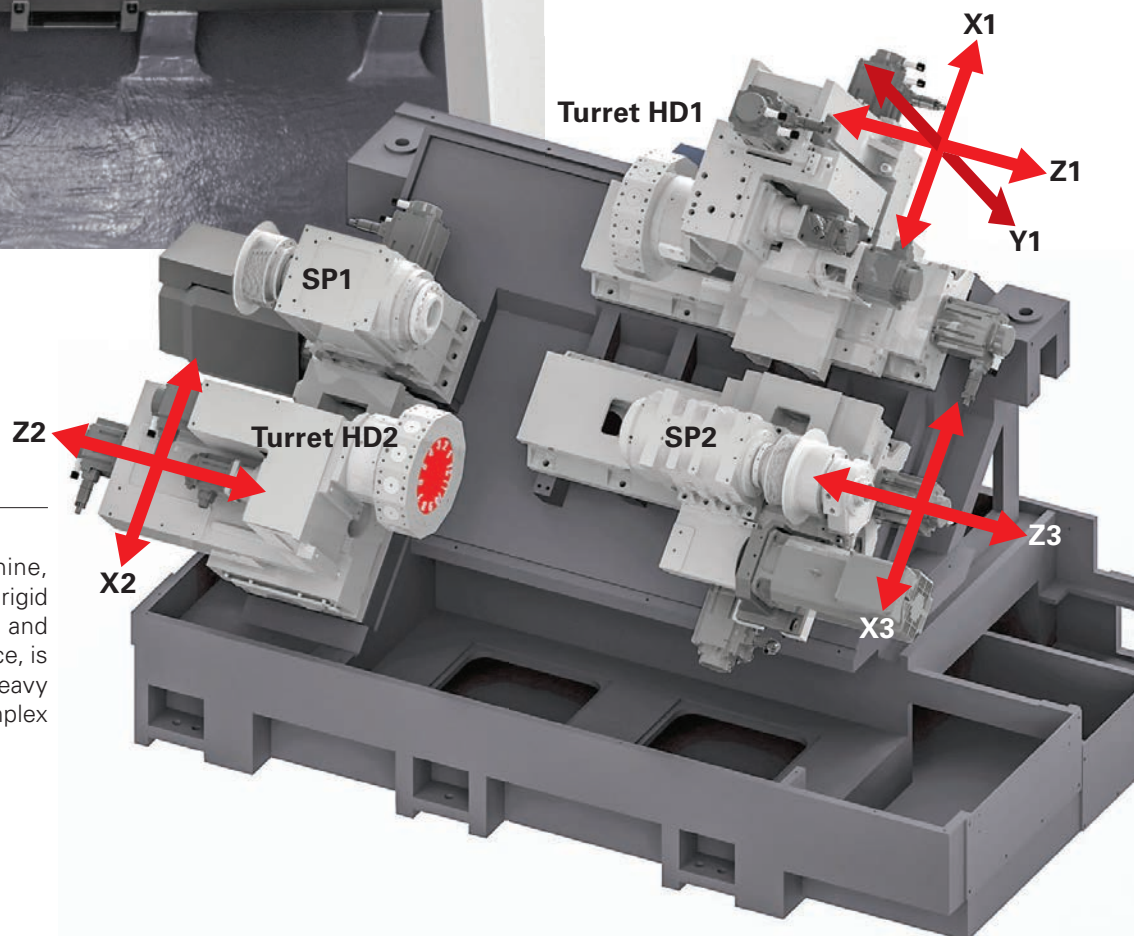

External View

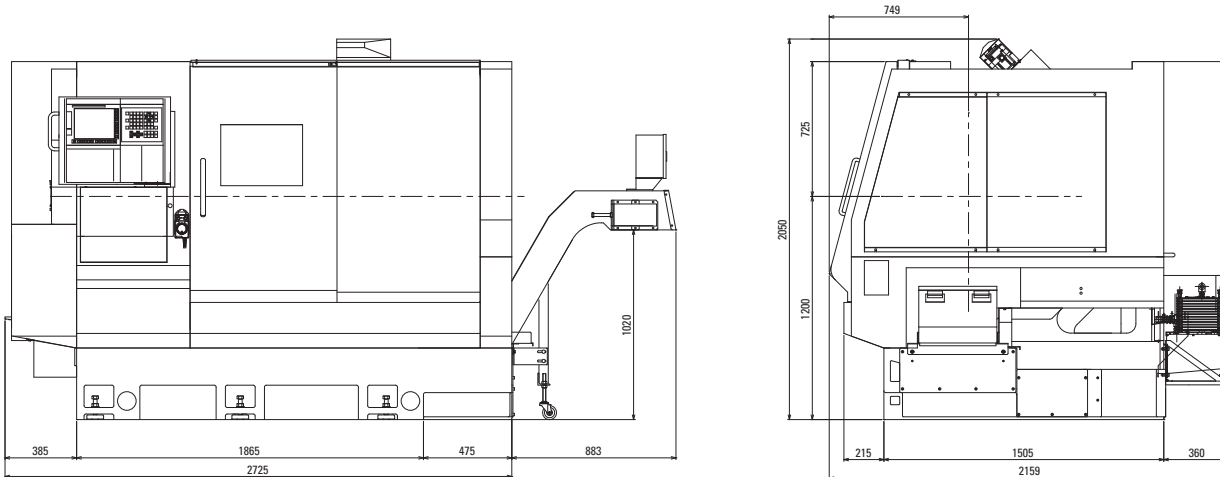


Accessories




Part catcher (Standard)
Discharges workpiece on to conveyor.




Cut-off confirmation (Standard)
This is a function to confirm that cut-off of the workpiece is completed.

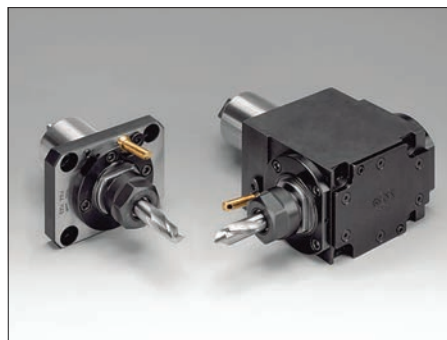

Revolving tools (Standard)
Ensures high-power, stable milling at a torque of 25 Nm.

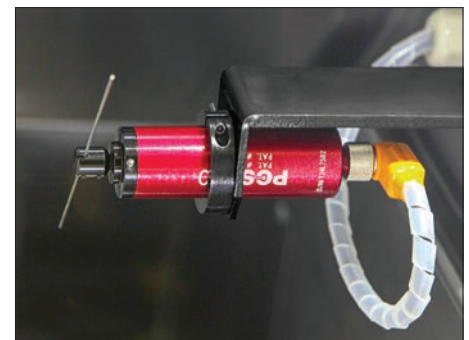

Drill breakage detector (Option)
Drill breakage is detected by the swing cylinder. The machine stops when breakage is detected.

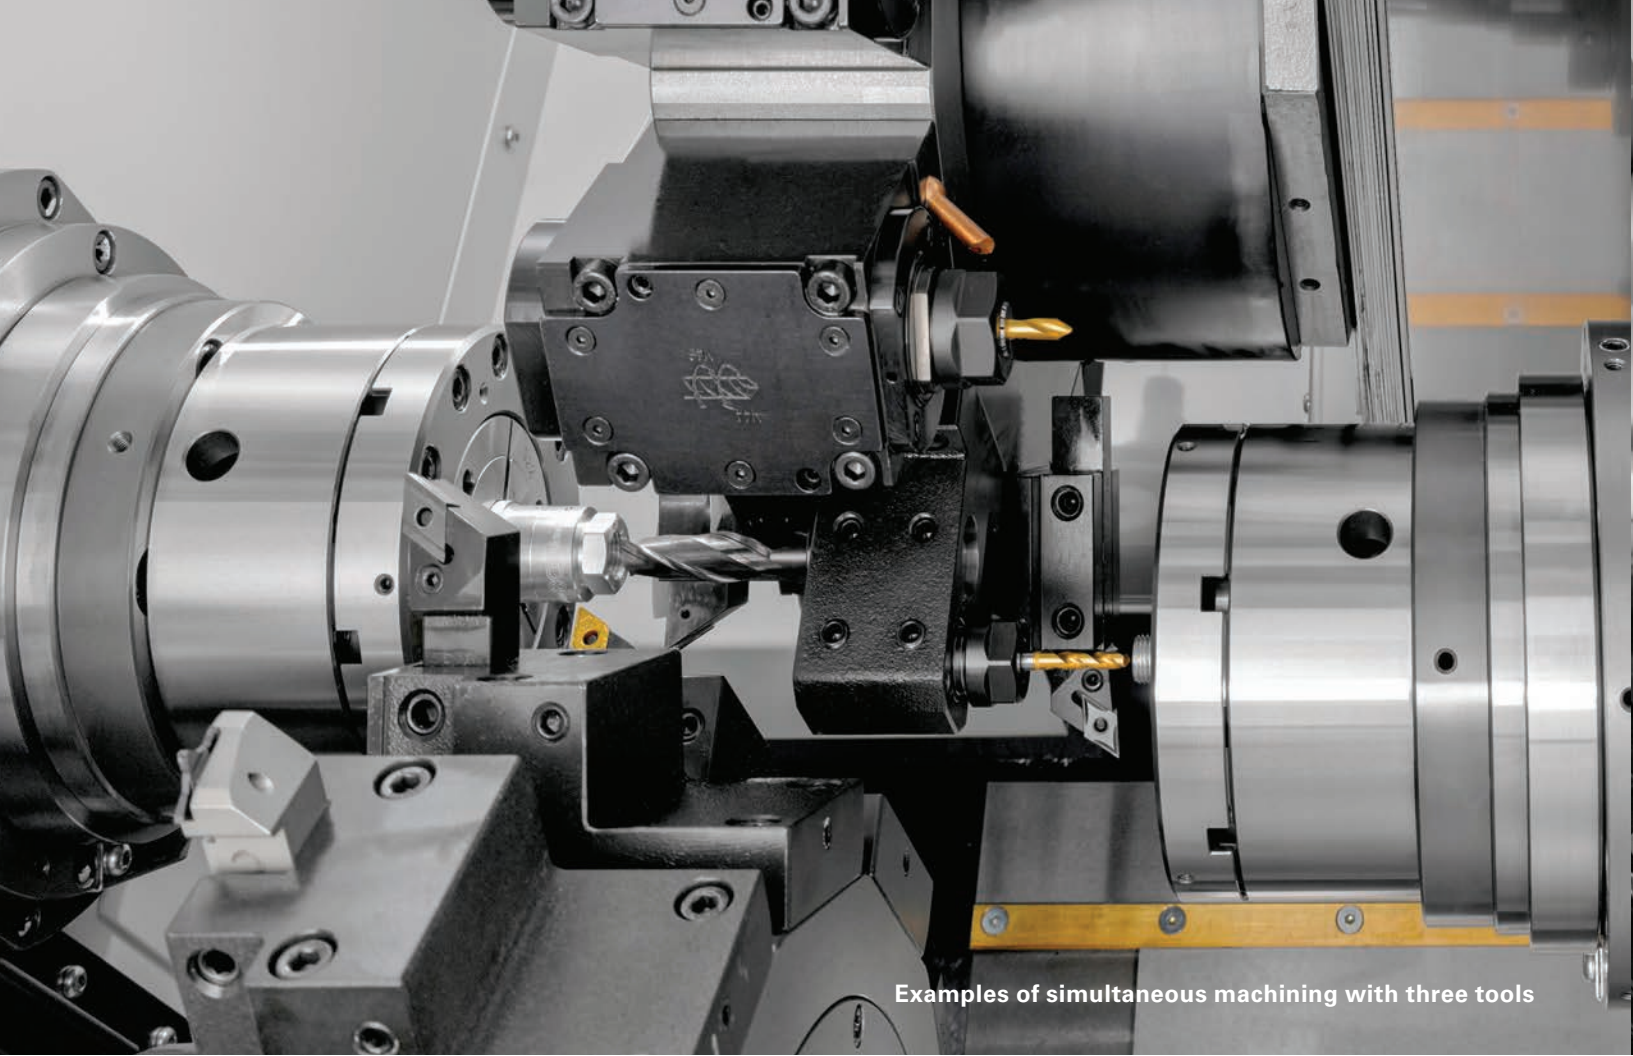


Examples of simultaneous machining with three tools

Turret

Indexing by a large-diameter curvic coupling, secure hydraulic turret clamping and rugged square guideways assure high precision and long life of the turret without compromise. This turret can accommodate revolving tools with a high machining torque of 25 Nm at all 12 positions.

Our unique tool holder mounting method using two guide pins makes it easy to mount and remove tool holders and ensures exceptionally high re-mounting accuracy.

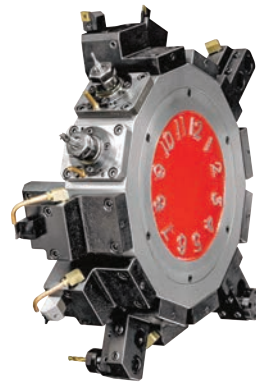



Tool holder using two guide pin mounting method

Spindle

A combination of "precision double-row cylindrical roller bearings" and "precision angular contact ball bearings" suppresses radial run-out and thermal displacement in the longitudinal direction as well as providing high rigidity.

Cross-section of spindle

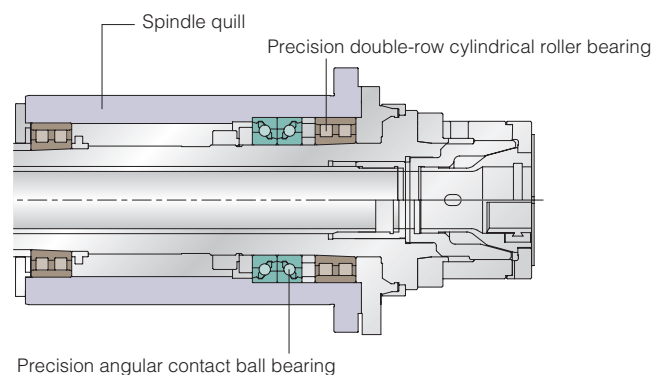

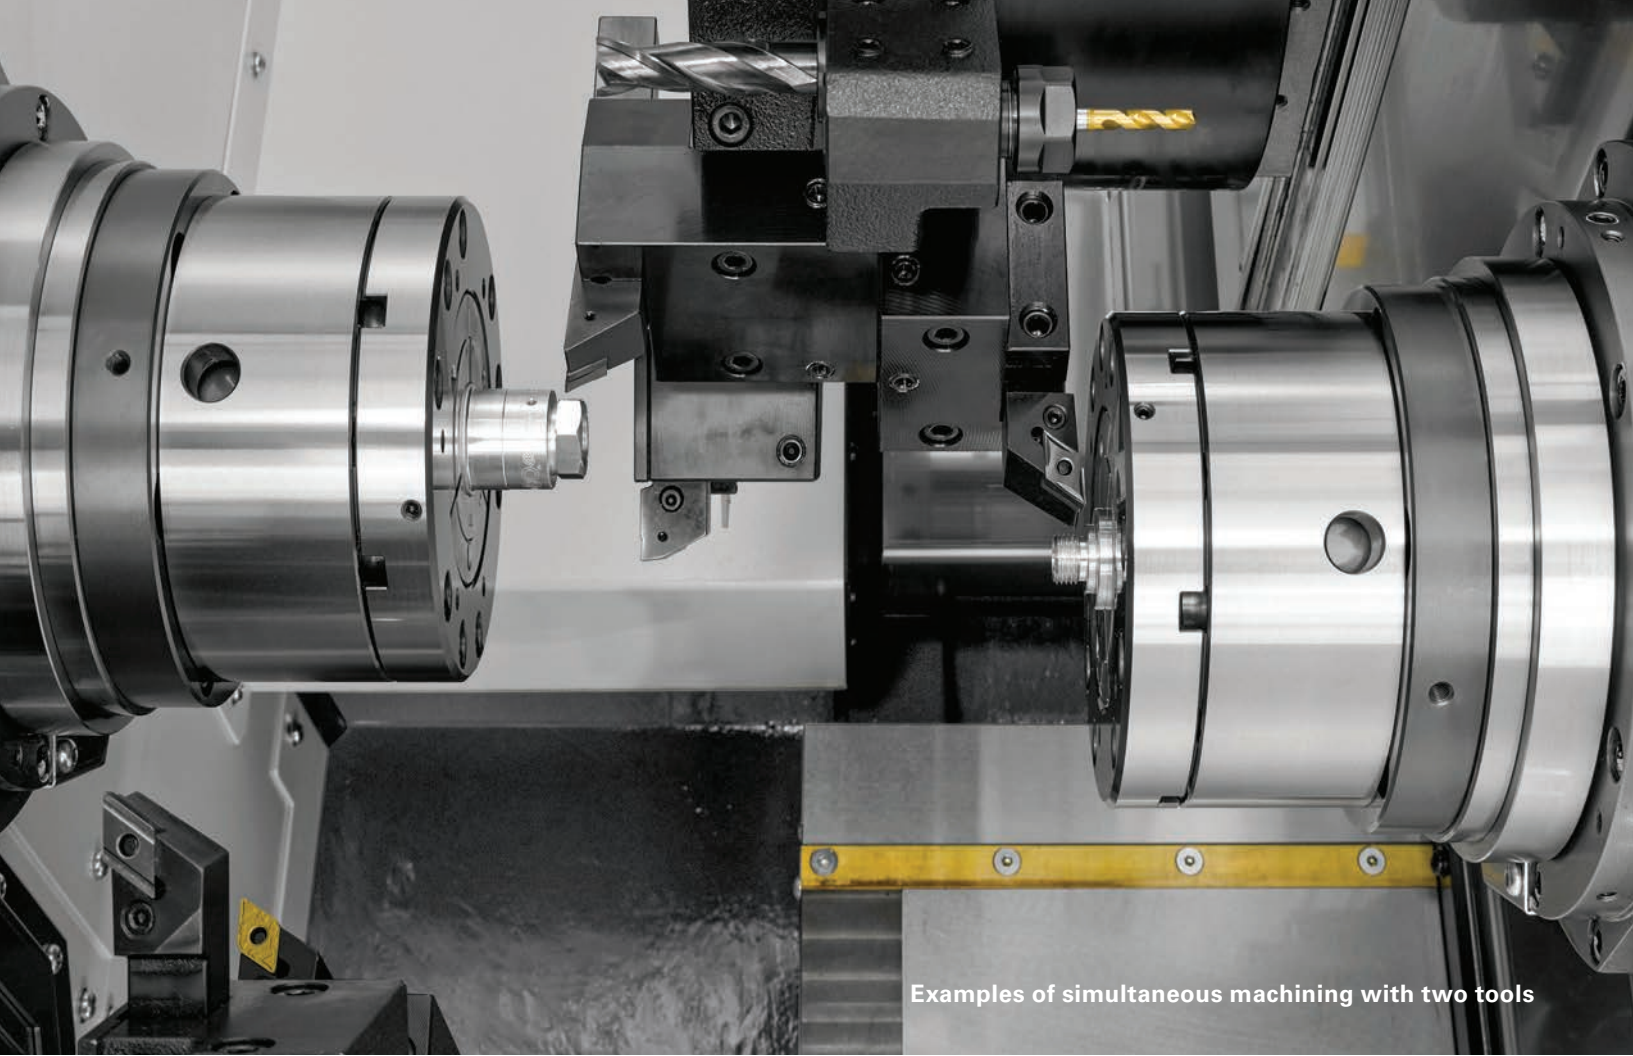

Examples of simultaneous machining with two tools

Comprehensive machining patterns






Equipping SP2 with an X3-axis has enabled simultaneous hole machining on both end faces, which was not possible on conventional BNE models.

In addition, superimposition control allows simultaneous cutting with two tools by synchronizing the cutting at SP2 with the cutting at SP1, and also simultaneous cutting with three tools including SP2, helping to shorten cycle times. So a full range of machining variations is offered.


■ Simultaneous machining of 3 tools

SP1, Turning & Drilling SP2, Drilling
SP1, Simultaneous Turning SP2, Drilling


■ Simultaneous machining of 2 tools

HD1-L, Drilling HD2-R, Drilling	HD1-L, Milling HD2-R, Milling	
		
HD1-R, Turning HD2-L, Turning	Left simultaneous machining (HD1 Turning, HD2 Drilling)	Right simultaneous machining (HD1 Turning, HD2 Drilling)
		



Convenient operation

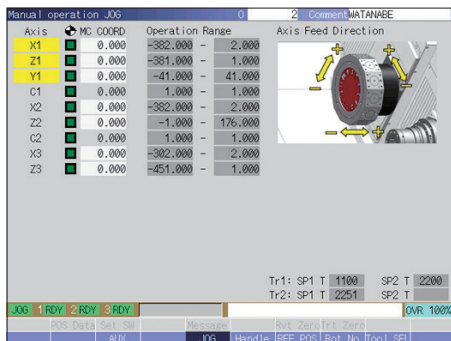


HMI (Human Machine Interface) is utilized.

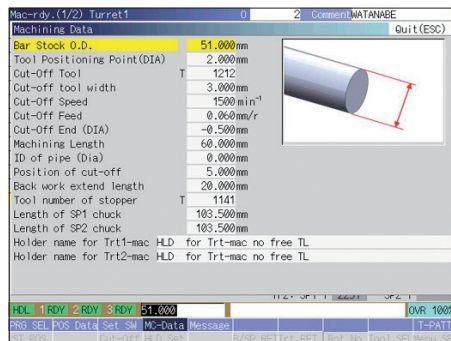



Machining data screen - All you have to do is input the machining length, chucking length and so on, and the escape and approach positions are automatically calculated. This is useful for collision prevention and shortening setup times.

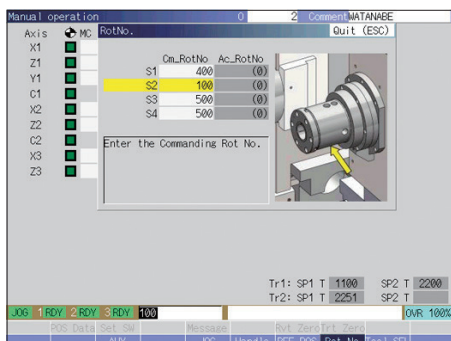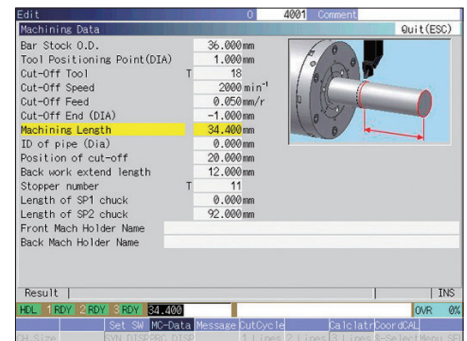


Graphics displayed for each item and screens that display all the necessary information in one place greatly improve operating convenience.

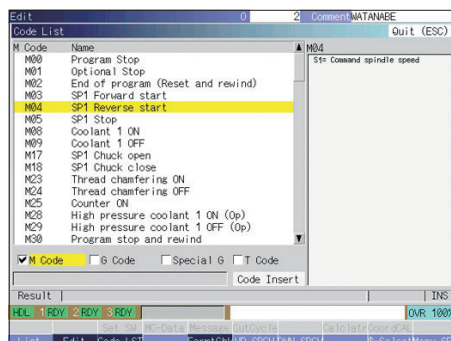


Support for programming – The function displays the list of G and M codes including explanations of the arguments.

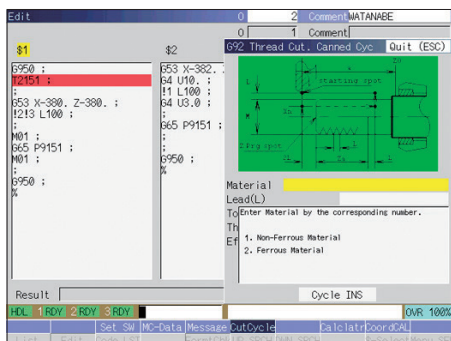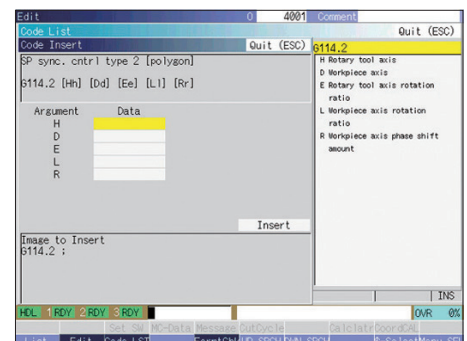



Canned drilling cycle is designed by dialogue form to support programming.

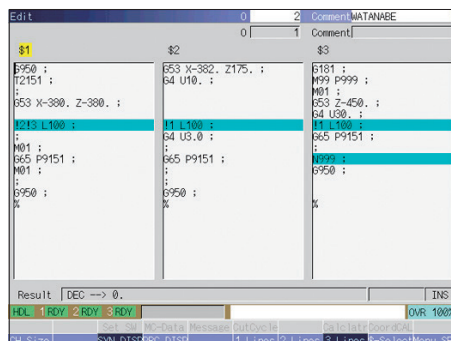

Easy-to-view edit screen – The coordinate calculation function and calculator function incorporated in the NC unit can be used for complex intersection point calculations.

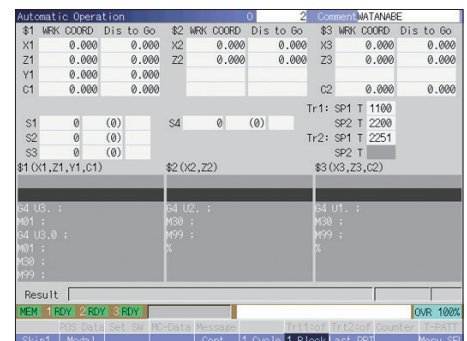

Tooling area

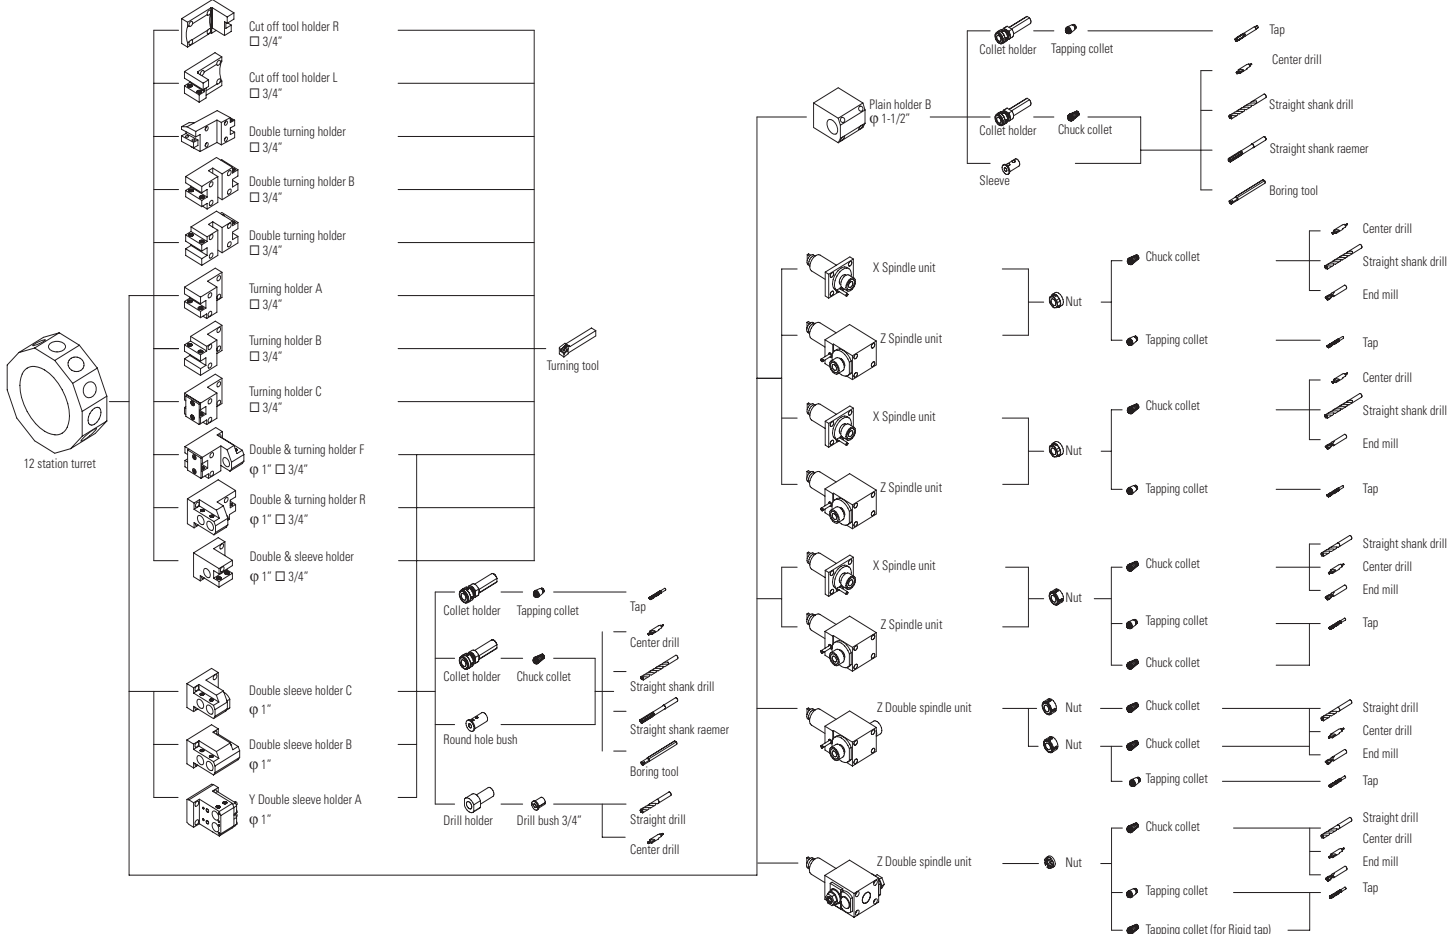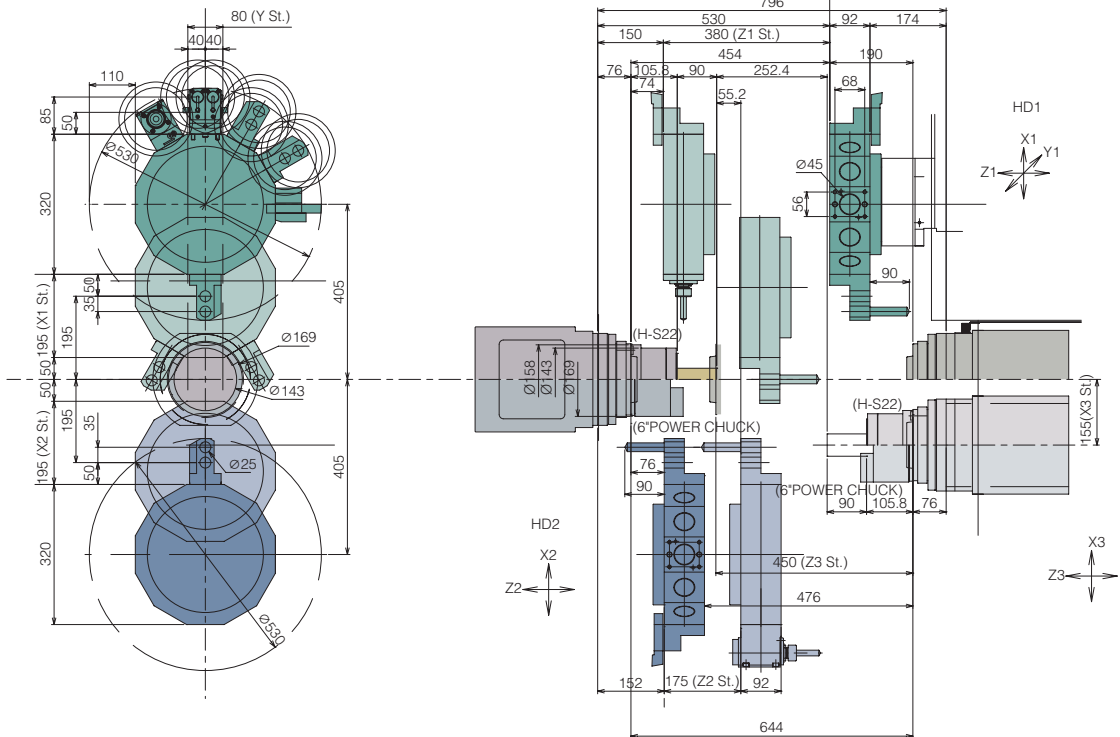

Specifications

Machine Model		BNE-51MSY
Machining capacity		
Maximum work length		90 mm
Maximum bar diameter	SP1	Ø 51 mm
	SP2	Ø 51 mm
Spindle		
Number of spindles		2
Spindle speed	SP1	5,000 rpm
	SP2	5,000 rpm
Spindle nose	SP1	A2-6
	SP2	A2-6
Draw tube Dia.	SP1	Ø 52
	SP2	Ø 52
Type of collet chuck	SP1	H-S22/DIN177E
	SP2	H-S22/DIN177E
Power chuck size and type	SP1	6" (Ø 69)
	SP2	6" (Ø 69)
Turret		
Number of turret		2
Turret stations	HD1	12 ST.
	HD2	12 ST.
Shank size of square turning tool		¾" Sq.
Diameter of drill shank		1"
Revolving tool		
Number of revolving tools		Max.12+12
Type of revolving tools		Single clutch
Tool spindle speed range		Max. 6,000 rpm
Feed rate		
Rapid feed rate	X1 axis	18 m/min
	Z1 axis	20 m/min
	Y1 axis	12 m/min
	X2 axis	16.2 m/min
	Z2 axis	18 m/min
	X3 axis	18 m/min
	Z3 (B) axis	20 m/min
Slide stroke	X1 axis	195 mm
	Z1 axis	380 mm
	Y1 axis	80 (±40) mm
	X2 axis	195 mm
	Z2 axis	175 mm
	X3 axis	155 mm
	Z3(B) axis	450 mm
Motors		
Spindle motor	SP1	15/11 kw (15 min./cont)
	SP2	7.5/5.5 kw (15 min./cont)
Revolving tool motor		4.0 kw 25 Nm
Hydraulic operating motor		1.5 kw
Lubricating motor		0.023 kw
Coolant motor		0.25 kw
High-pressure coolant motor		0.8/1.36 kw (50/60 Hz)
Turret index motor		0.7 kw
Power supply		
Capacity		44 KVA
Voltage		AC 200/220 V
Air supply		0.5 Mpa
Fuse		125 A
Hydraulic oil tank capacity		10 L
Lubricating oil tank capacity		4 L
Coolant tank capacity		350 L
Machine height		2,050 mm
Floor space		W 2,725 × D 2,159 mm
Machine weight		17,640 lbs.

NC Model device	MITSUBISHI M730VS
Command specified axes	HD1: X1, Z1, Y1, HD2: X2, Z2, SP1: C1, SP2: C2, SP2 Slide: X3, Z3
Auxiliary axes	HD1 Revolving tool: C3 HD1 Revolving tool: C4 HD1 Index T1 HD2 Index T2
Control axis groups	3 groups
Input code	ISO
Command input system	Incremental and absolute
Tool offset data	99 pairs
Feed command system	Per rotation feed and per minute
Cutting feed rate and	Max.100%
Rapid feed override	
Zero return function	Manual zero return
On machine program check function	Manual pulse generator
Program storage capacity	512 KB (1200 m)
Input/Output interface	Compact flash card slot
Spindle C-axis function	0.001°
Display device	10.4" color LCD

Standard functions

Manual feed function
Manual data input (MDI) function
Back up function
Operation time display
Product counter display
Cycle time check function
Automatic screen off function
Optional block skip
Optional stop
Constant surface speed control
Cut off confirmation
Corner chamfering/Radius function
Tool nose R compensation function
Arc radius specification
Thread cutting canned cycle
Spindle synchronizing control function
Revolving tool synchronous tap function
Custom macro
Multiple canned cycles for turning
Canned cycle for drilling
High speed program check function
Milling interpolation
Helical Interpolation
Tool Life Management I
Automatic power shut-off RS232C
Spindle brake
Air blow
Work ejector
Parts conveyor
Coolant level switch
High pressure coolant
Inner high pressure coolant & air blow
Parts catcher
Parts box
Collet chuck system
Chip conveyor
Total & preset counter
Signal tower
Filler tube
Cut-off confirmation
Thermo revision

Preparation functions

Start position automatic return
Waiting point automatic return
Sub spindle retract return
Turret retract return
Automatic cut-off machining function
Tool set function
Spindle speed set function
Tool select function
Chuck adjustment function
AUX Manual select function
JOG operation function
Handle operation function
Spindle speed simultaneous command for 4 spindle
3 Sets of M code simultaneous command
Control axis swap function
Arbitrary superposition function
Background editing
Function to superimpose 2 pairs of axes

Editing support functions

Calculator function
Code list display
Code insert
Coordinate calculation function
Format check

Optional accessories

Chip box
Turret high pressure coolant & air blow
Tool setter
Spindle inner bushing
Bar feeder inner bushing
Parts carrier
Left over catcher
Drill checker
Drill checker touch (HD1)
100 V

Marubeni Citizen-Cincom Inc.

40 Boroline Road
Allendale, NJ 07401
201-818-0100

2316 Touhy Avenue
Elk Grove Village, IL 60007
847-364-9060

17815 Newhope Street, Suite P
Fountain Valley, CA 92708
714-434-6224

68 Moylan Lane
Agawam, MA 01001
413-786-6655

www.marucit.com